


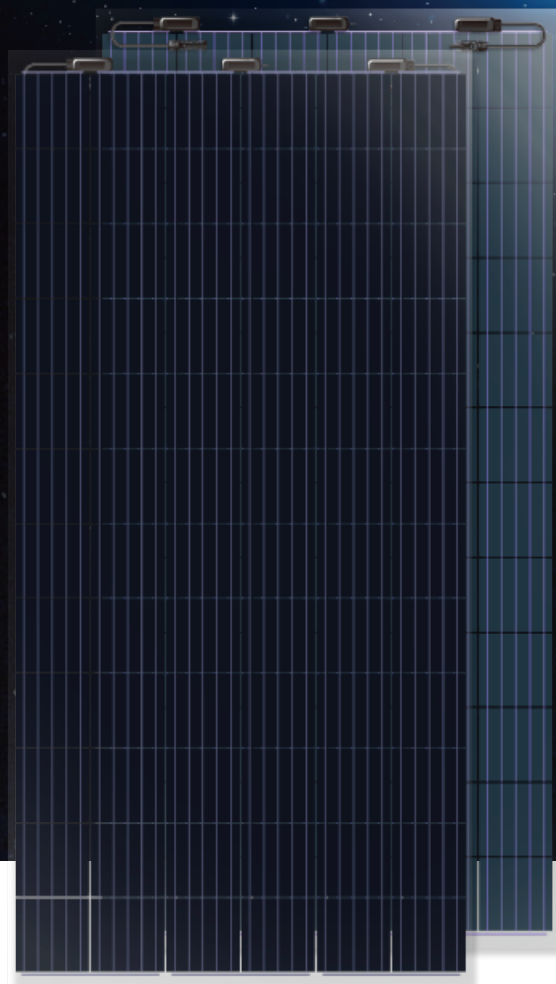

> CP72-4 friline 360-370 Watt Frameless

158mm 72Cells PV Module

BLACK


*BLACK FRAME/BLACK BACK-SHEET PRODUCTS
ARE AVAILABLE UPON REQUEST



12 Years
Material & Craft
Quality assurance

12 Years
90% Output
Power guarantee

25 Years
80% Output
Power guarantee

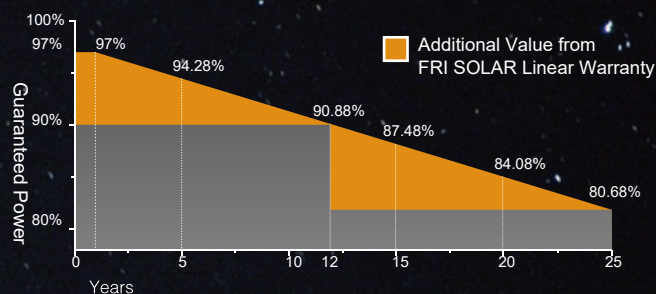

> PRODUCT FEATURE



High transmissivity,
low-iron
tempered glass.



Using high
efficiency bifacial
solar cells



Excellent
performance
in low-light
environments



High quality
junction box and
connector
systems



100% inspection,
to guarantee
the reliability of
solar systems



Anti LID



Anti PID



Lower temperature
coefficient

- > Extreme load resistance
- > Bifacial cell technology up to +20% more power
- > Glass/glass laminate for BIPV use cases
- > laminated safety glass acc. EN12600
- > hail resistance HW5

> MANAGEMENT SYSTEM



ISO 9001 :
Quality management system



ISO 14001 :
Standard for environmental management system




OHSAS 18001 :
International standard for occupational health
and safety assessment system

> PRODUCT CERTIFICATES




Dimension Drawing

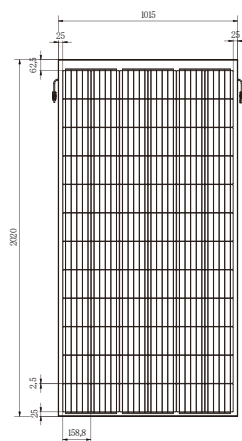

All Dimensions in mm
 The above drawing is a graphical representation of the product.
 For engineering quality drawings please contact FRI SOLAR.

I-V Graph

Current-Voltage & Power-Voltage Curves (CP72-4 friline)

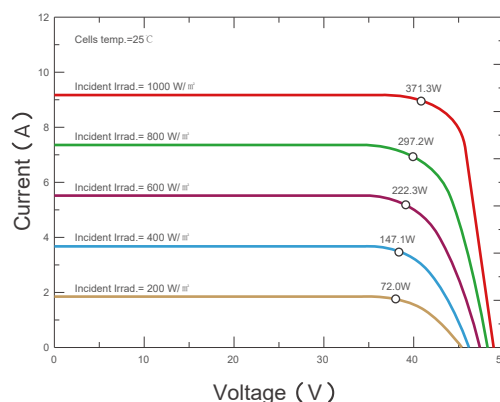

Electrical Characteristics (STC)

Module Type	CP72-4 friline	
	STC	
Maximum Power- Pmax(W)	360	370
Open Circuit Voltage - Voc(V)	48.53	49.18
Short- Circuit Current - Isc(A)	9.25	9.28
Voltage at Pmax -Vmp(V)	41.18	41.83
Current at Pmax - Imp(A)	8.74	8.85
Module Efficiency -ηm(%)	17.56	18.05
Power Tolerance(W)	(0, +4.99W)	
Maximum System Voltage(V)	1000/1500Vdc (IEC / UL)	
Maximum Series Fuse Rating (A)	20A	

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Mechanical Specifications

External Dimensions	2020*1015*9mm
Weight	43kg
Solar Cells	Mono crystalline 158.75x158.75mm (72pcs)
Front Glass	4mm Ultra white float glass according EN1863
Back Glass	4mm Plain white float glass according EN1863
Junction Box	IP68
Output Cables	4.0mm², 350mm (+), 350mm (-)
Connector	MC4 Compatible

Temperature Characteristics

Pmax Temperature Coefficient	-0.370%/°C
Voc Temperature Coefficient	-0.28%/°C
Isc Temperature Coefficient	+0.048%/°C
Operating Temperature	-40 ~ +85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C