

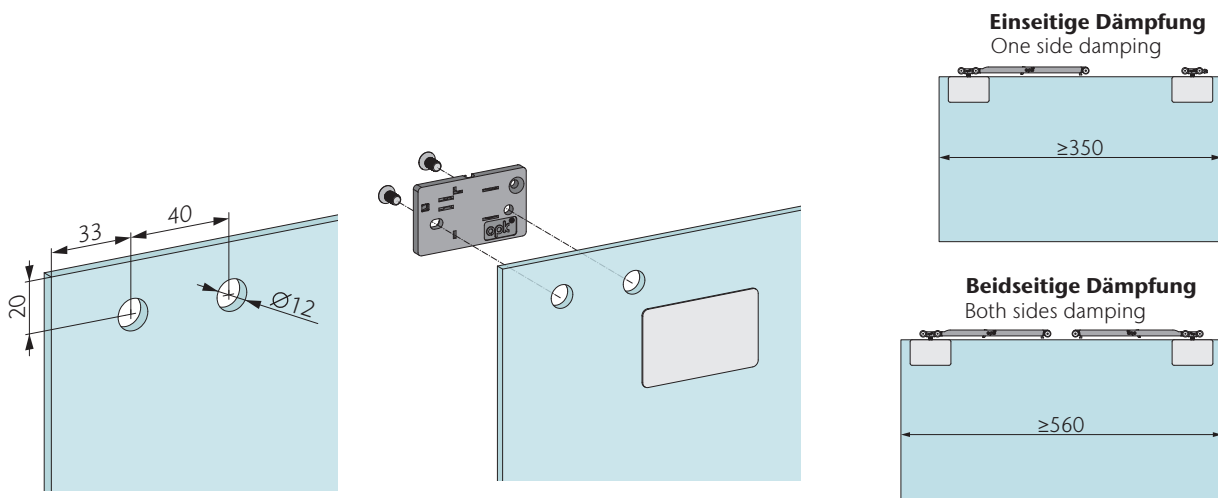


# opk Speedboat G InSide

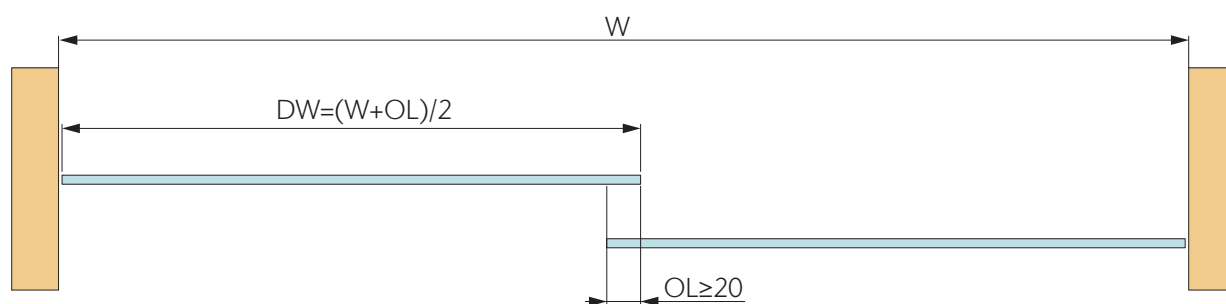

## Technische Zeichnung

Technical drawing

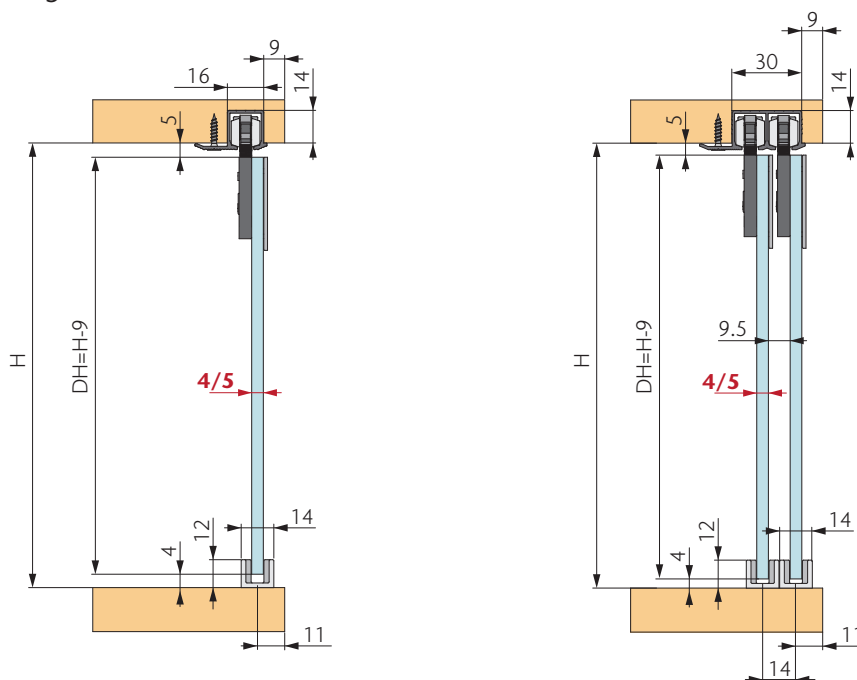

# opk Speedboat G InSide



Art.-Nr./No.

|  |  |     |          |       |                |
|--|--|-----|----------|-------|----------------|
|  |  | ≤20 | 350~1000 | ≤1400 | 01-011-202-001 |
|  |  | ≤20 | 560~1000 | ≤1400 | 01-011-203-001 |

## Konfiguration für 1 Tür

Configuration for 1 door



|                                                                                                                  |  |   |   |
|------------------------------------------------------------------------------------------------------------------|--|---|---|
| <b>Laufwerk mit Dämpfer Glas</b><br><i>Running part with damping glass</i>                                       |  | 1 | 2 |
| <b>Aktivator</b><br><i>Activator</i>                                                                             |  | 1 | 2 |
| <b>Laufwerk</b><br><i>Running part</i>                                                                           |  | 1 | 0 |
| <b>Stopper</b><br><i>Stopper</i>                                                                                 |  | 1 | 0 |
| <b>Gehäuse Glas</b><br><i>Housing glass</i>                                                                      |  | 2 | 2 |
| <b>Führung Glas</b><br><i>Guiding part glass</i>                                                                 |  | 1 | 1 |
| <b>ST3x8 Senkkopfschraube mit Kreuzschlitz</b><br><i>ST3x8 Cross recess countersunk head self-drilling screw</i> |  | 2 | 2 |
| <b>sw 2.5mm Innensechskant</b><br><i>sw 2.5mm hex key</i>                                                        |  | 1 | 1 |