


opk Submarine 9 W InSide



Technische Zeichnung


Technical drawing

Keine Dämpfung
No damping

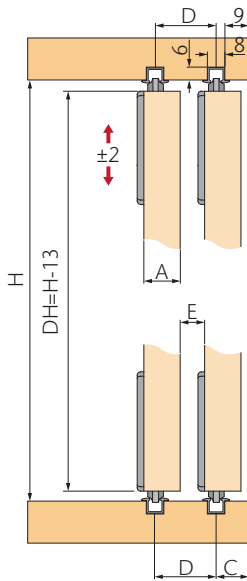


	A (16mm)	A (18mm)	A (19mm)
C	13mm	13mm	13mm
D	22mm	24mm	25mm
E	6mm	6mm	6mm

Beidseitige Dämpfung
Both sides damping

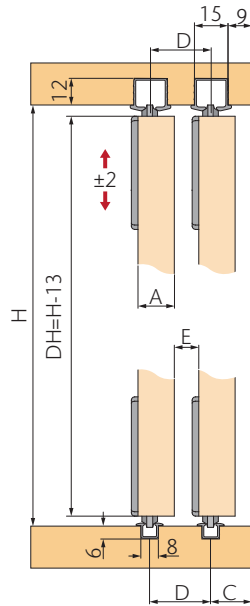



	A (16mm)	A (18mm)	A (19mm)
C	16.5mm	16.5mm	16.5mm
D	22mm	24mm	25mm
E	6mm	6mm	6mm

Beidseitige Dämpfung
Both sides damping




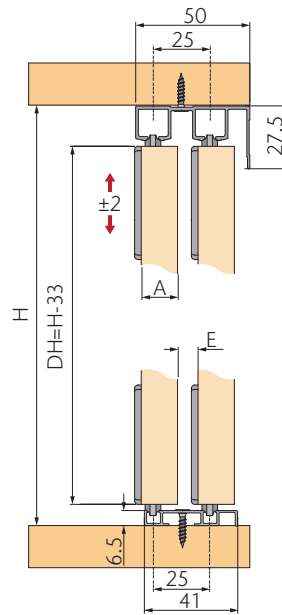


	A (16mm)	A (18mm)	A (19mm)
C	9mm	7mm	6mm
E	9mm	7mm	6mm

Beidseitige Dämpfung
Both sides damping

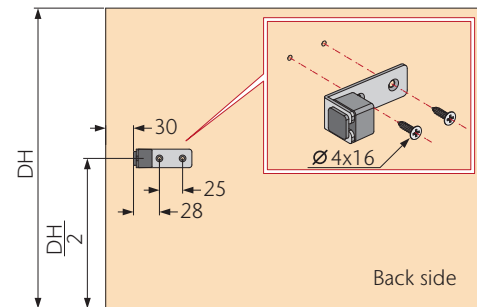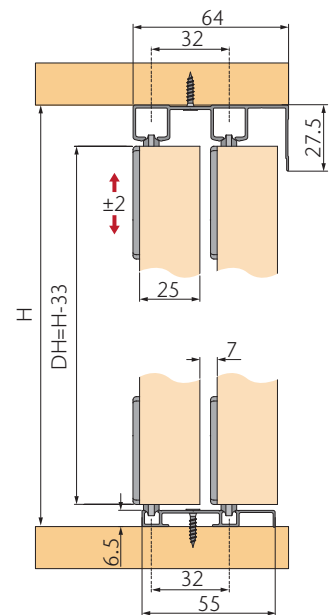

Back side

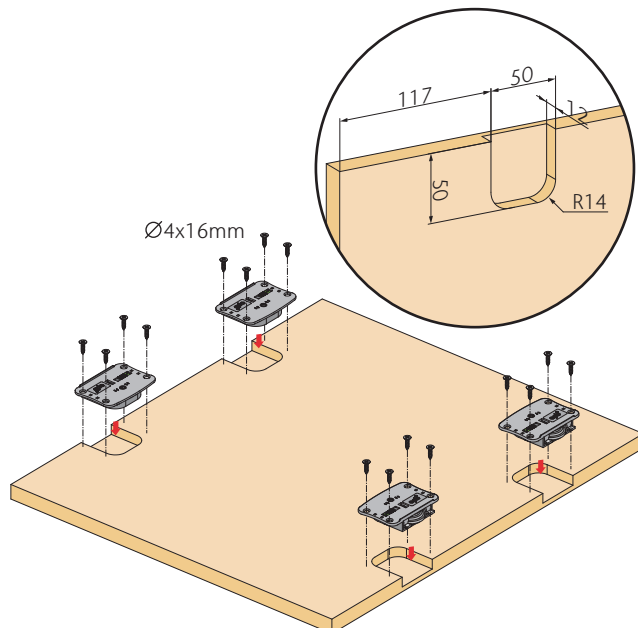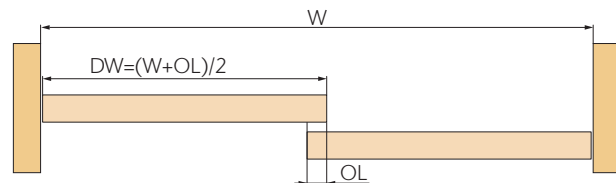

opk Submarine 9 W InSide



Art.-Nr./No.

		≤30	300~ 1500	≤2400	01-491-101-100
		≤15	500~ 1500	≤2400	01-491-102-115
		≤30			01-491-102-130

Konfiguration für 1 Tür

Configuration for 1 door



Laufwerk/Führung <i>Running/Guiding part</i>		4	4
Dämpfer <i>Damper</i>		0	2
Stopper <i>Stopper</i>		2	0
ST4.2x16 Senkkopfschraube mit Kreuzschlitz <i>ST4.2x16 Cross recess countersunk head self-drilling screw</i>		16	16
sw 2mm Innensechskant <i>sw 2mm hex key</i>		1	1